


DIN69893 Form A/E/F

Standard toolholder

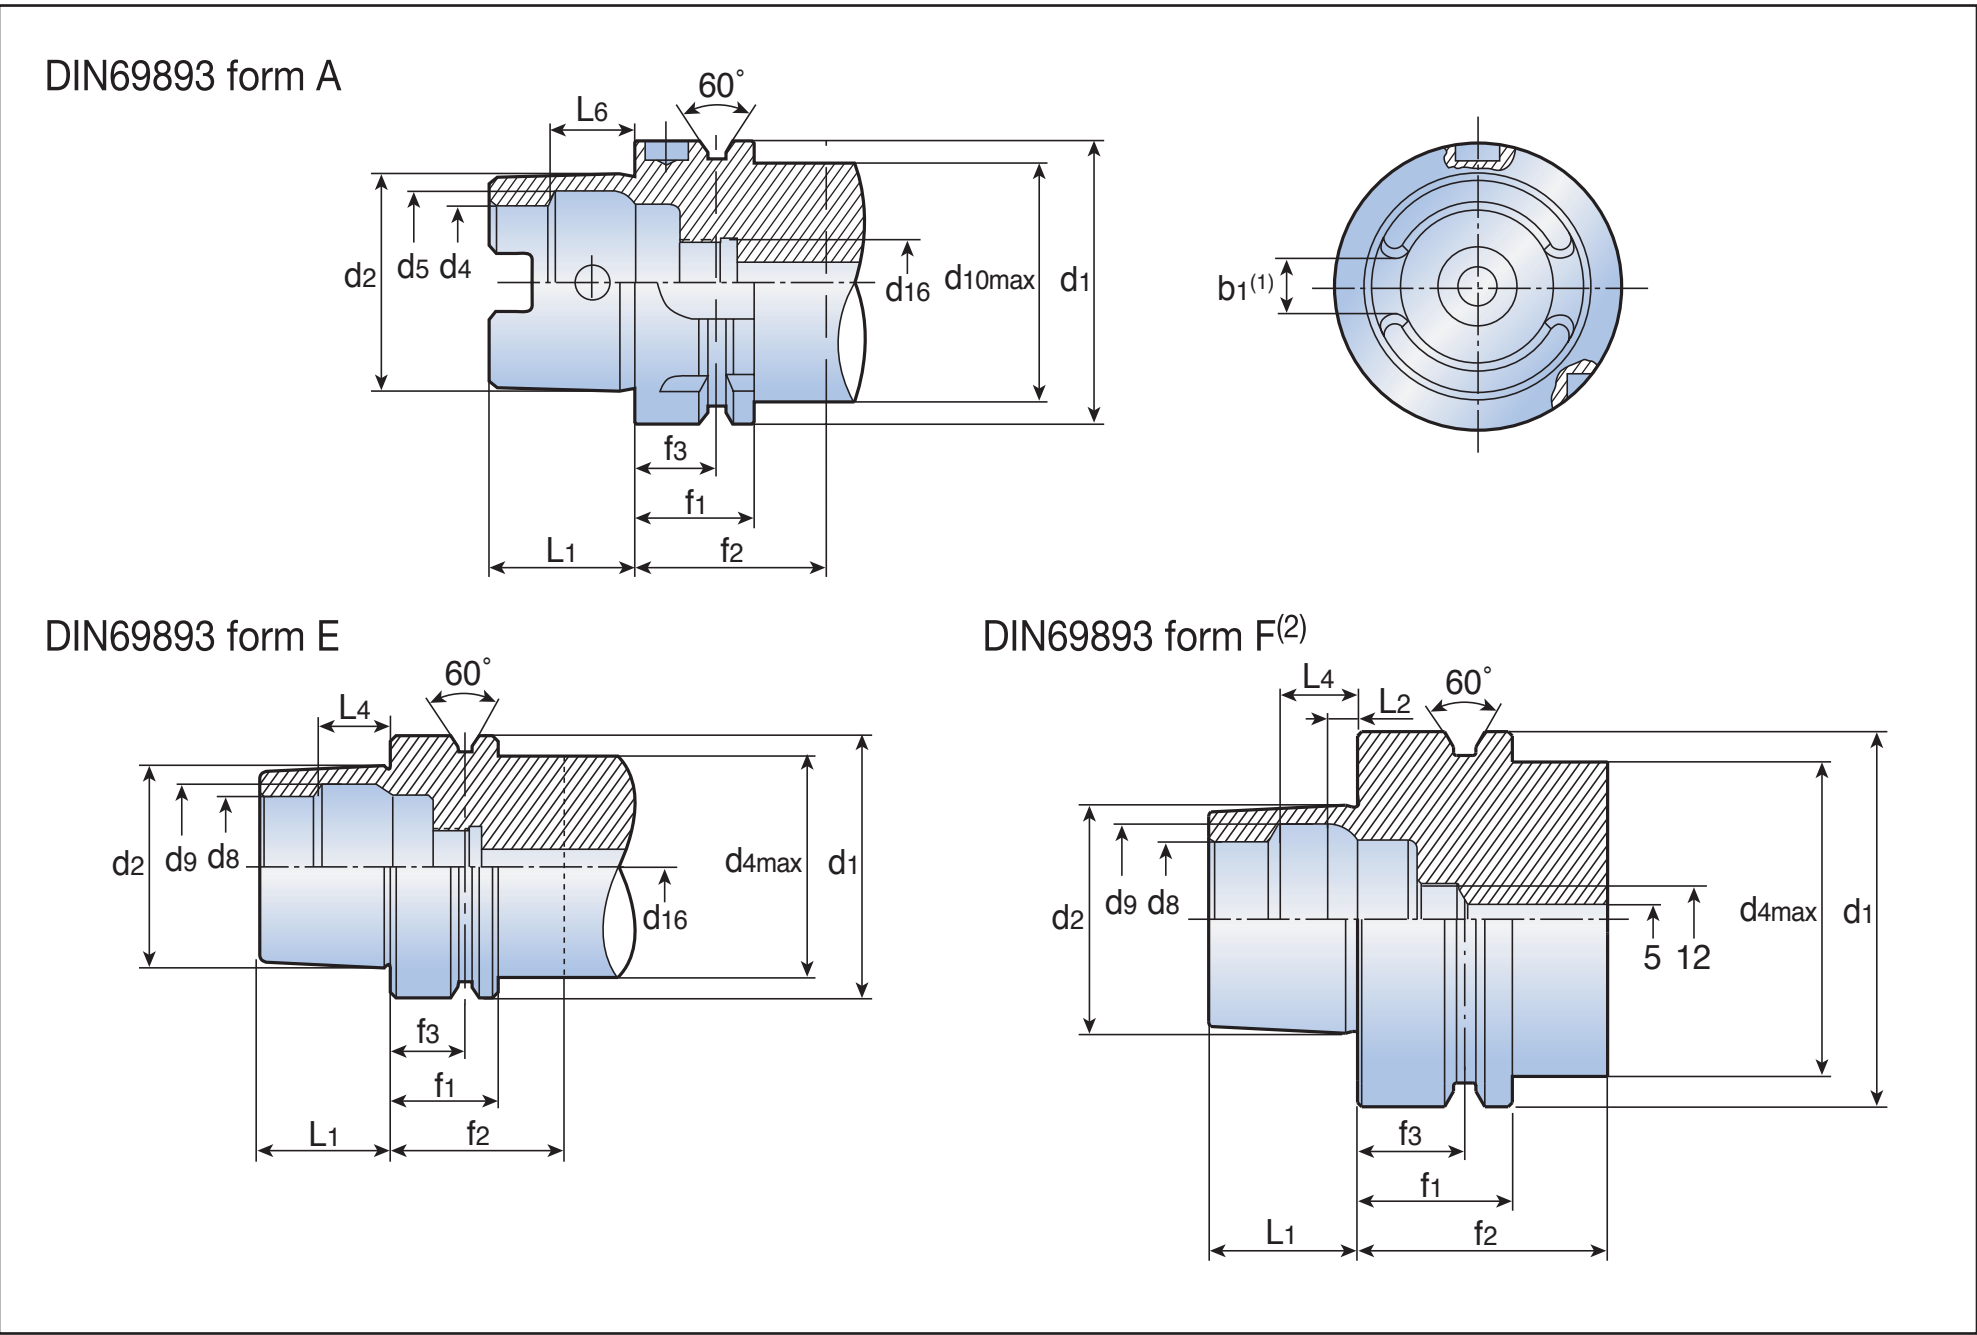

DIN69893 form A

HSK-A	d1 h10	d2	d4 H10	d5 H11	d10max	d16	L1 -0.2	L6 JS10	b1 ±0.04 ⁽¹⁾	f1 -0.1	f2min	f3 ±0.1
40	40	30	21	25.5	34	M12x1	20	11.42	8.05	20	35	16
50	50	38	26	32.0	42	M16x1	25	14.13	10.54	26	42	18
63	63	48	34	40.0	53	M18x1	32	18.13	12.54(12.42)	26	42	18
80	80	60	42	50.0	67	M20x1.5	40	22.85	16.04	26	42	18
100	100	75	53	63.0	85	M24x1.5	50	28.56	20.02 (19.9)	29	45	20

- ⁽¹⁾ The dimensions in parentheses refer to dimension b1 only for HSK A...WH tools.
These tools feature key slot gap and tolerance, sed on turning tools for accurate cutting edge height position.
(According to Japanese ICTM standard and ISO 12164/3 standard)

DIN69893 form E

HSK-E	d1 h10	d2	d4max	d8 H10	d9 H11	d16	L1 -0.2	L4 JS10	f1 -0.1	f2min	f3 ±0.1
32	32	24	26	17	19.0	M10x1	16	8.92	20	35	16
40	40	30	34	21	25.5	M12x1	20	11.42	20	35	16
50	50	38	42	26	32.0	M16x1	25	14.13	26	42	18
63	63	48	53	34	40.0	M18x1	32	18.13	26	42	18

DIN69893 form F⁽²⁾

HSK-F	d1 h10	d2	d4max	d8 H10	d9 H11	L1 -0.2	L2	L4 JS10	f1 -0.1	f2min	f3 ±0.1
63	63	38	53	26	32	25	5.0	14.13	26	42	18

- ⁽²⁾ Without crosshole
► For non-stock items: Supply condition is subject to availability
If not available in stock then MOQ (Minimum order qty) will be applicable